

KUWES WIRE & CABLE

DATA SHEET & TEST REPORT

1-2

Specification for KUWES Cat.6 enhanced UTP 600MHZ Solid Lan Cable
Item No. KS-UTP-C6E Version: A4 Date: July 08, 2017

UL 444 & CSA-C22.2 Type CM, 24AWG x 4 Pairs

ANSI/TIA-568-C.2 : Horizontal Cable (Solid Conductor)

1. Conductor: Solid Bare copper x 24AWG (Turbo6e Type)

2. Insulation : HDPE

Min. Avg. Thickness: 0.23 mm;

3. Color Code:

Pair 1: Blue & White/Blue;

Pair 2: Orange & White/Orange

Pair 3: Green & White/Green;

Pair 4: Brown & White/Brown

4. Jacket: 75°C PVC Compound

Min. Avg. Thickness: 0.6 mm;

Min. Thickness: 0.50 mm

Approximate O.D.: 5.7 mm +/- 0.3mm

5. Electric Requirements: (Cable length: 100M)

Characteristic Impedance(Z_0): 85~115 Ω (1~500 MHz)

DC. Resistance Capacitance Unbalance: 5%

Pair-to-Ground Capacitance Unbalance: 330 pF/100M Max

Conductor Resistance: 7.32 Ω / 100M 20°C Max

Mutual Capacitance: 5600 pF/100m Max

Spark Test: 2.5KV

Nominal Velocity of Propagation (NVP): 69%

Turbo 6e




ROHS Compliant

KUWES WIRE & CABLE

DATA SHEET & TEST REPORT

2-2

Turbo Cat.6 enhanced UTP 600MHZ Solid Lan Cable

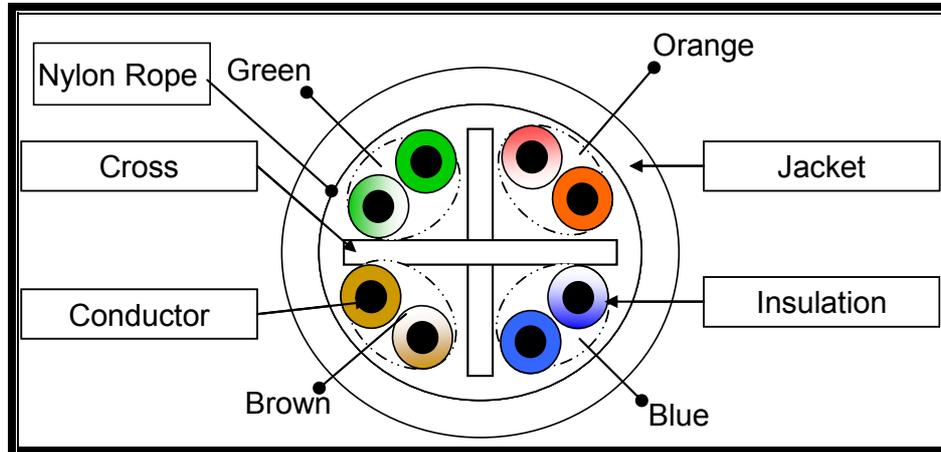

Frequency	Att.	Pr-Pr	PS	Prop.	Delay	Return Loss	Pr-Pr	PS
MHz	Solid	NEXT	NEXT	Delay ns	Skew ns		ELFEXT	ELFEXT
*1	2.1	74.3	72.3	570	45	20.0	67.8	64.8
10	6.0	59.3	57.3	545	45	25.0	47.8	44.8
20	8.5	54.8	52.8	542	45	25.0	41.8	38.8
31.25	10.7	51.9	49.9	540.4	45	23.6	37.9	34.9
62.5	15.4	47.4	45.4	538.6	45	21.5	31.9	28.9
100	19.8	44.3	42.3	537.6	45	20.1	27.8	24.8
200	29.0	39.8	37.8	536.5	45	18.0	21.8	18.8
250	33.1	38.3	36.3	536.3	45	17.3	19.8	16.8
300	36.4	35.9	34.1	534.3	45	16.2	18.2	15.2
400	43.0	34.4	33.8	534.0	45	15.1	15.7	12.7
550	51.8	34.1	33.2	533.6	45	13.2	12.9	9.9
600	55.3	32.2	31.3	533.6	45	12.3	12.4	8.6

ROHS Compliant